


AAN

AAN . Apollo SDK.

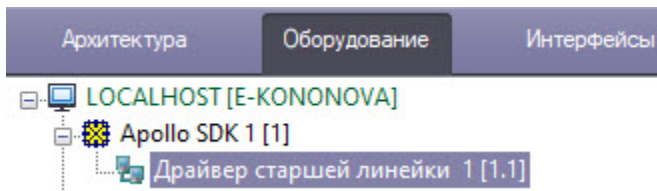


AAN:

1. : COM- Ethernet (1).

The screenshot shows the driver configuration window for RS-232. The 'Тип драйвера' (Driver type) is set to 'RS-232'. The 'Настройки драйвера' (Driver settings) section shows 'COM-порт' (COM port) set to '1' and 'Скорость обмена' (Baud rate) set to '57600'. A large number '1' is next to the driver type, and a large number '2' is next to the settings section.

2. COM-, (2).
3. Ethernet, IP- (3).

The screenshot shows the driver configuration window for Ethernet. The 'Тип драйвера' (Driver type) is set to 'Ethernet'. The 'Настройки драйвера' (Driver settings) section shows 'IP' set to '127 . 0 . 0 . 1' and 'Порт' (Port) set to '3001'. A large number '3' is next to the settings section.

4.  .